



RA12-45 (12V45Ah)

RA12-45 is a general purpose battery with 10 years floating design life, meet with IEC, JIS .BS and Eurobat standard. With heavy duty grid, thickness plates, special additives, RA series battery have long and reliable standby service life. Our RA Series batteries keep high consistent for better performance in series usage.



Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	45Ah@10hr-rate to 1.75V per cell @25°C
Weight	Approx. 14.0 Kg
Max. Discharge Current	450A (5 sec)
Internal Resistance	Approx. 8 mΩ
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	13.5 A
Equalization and Cycle Service	14.6 to 14.8 VDC/unit Average at 25°C
Self Discharge	RITAR batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F4/F11
Container Material	A.B.S. (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.



MH28539







G4M20206-0910-E-16



ISO9001:2000 Certificate

Dimensions

Unit: mm Dimension: 198(L)×166(W)×171(H)

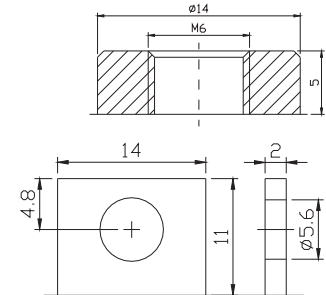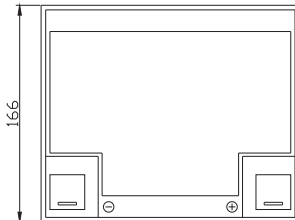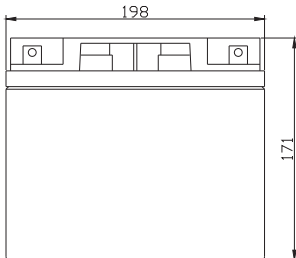

Constant Current Discharge Characteristics: A (25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	157.25	115.78	84.240	51.750	29.250	16.339	11.745	9.7200	7.9560	5.5898	4.7263	2.4995
10.0V	152.70	110.16	82.512	50.895	29.115	16.216	11.700	9.6750	7.9092	5.5444	4.6809	2.4541
10.2V	148.18	106.27	81.216	50.445	28.845	16.093	11.610	9.6300	7.8624	5.4989	4.6354	2.4086
10.5V	133.06	98.064	77.328	49.185	28.575	15.971	11.565	9.5400	7.7688	5.4535	4.5900	2.3632
10.8V	120.10	89.424	71.280	47.025	27.900	15.684	11.250	9.3150	7.6284	5.3626	4.5446	2.3177
11.1V	104.54	79.920	63.936	44.055	26.505	14.988	10.755	8.8650	7.3008	5.1353	4.4082	2.1814

Constant Power Discharge Characteristics: W(25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	1649.2	1231.1	906.47	554.81	334.53	187.96	135.54	112.32	92.102	64.864	53.145	28.071
10.0V	1605.1	1175.9	887.64	547.88	332.91	187.22	135.27	112.05	91.541	64.592	52.600	27.799
10.2V	1556.8	1136.7	875.59	541.47	330.48	185.50	134.46	111.51	91.260	64.046	52.327	27.526
10.5V	1401.9	1050.4	834.91	529.16	327.24	183.78	133.65	110.70	90.418	63.501	51.782	27.254
10.8V	1261.0	953.68	767.11	505.05	319.14	181.08	130.41	107.73	89.014	62.139	51.237	26.981
11.1V	1088.5	846.96	685.00	473.24	302.40	172.73	123.93	102.60	84.521	59.958	49.602	25.891

All mentioned values are average values.


Effect of temperature on long term float life

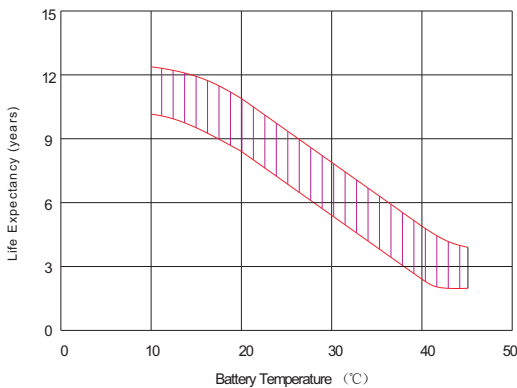


Storage characteristic

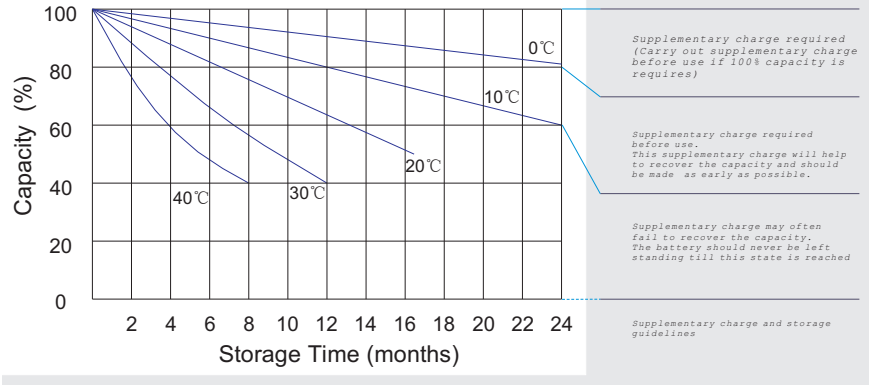

Charge characteristic Curve for standby use

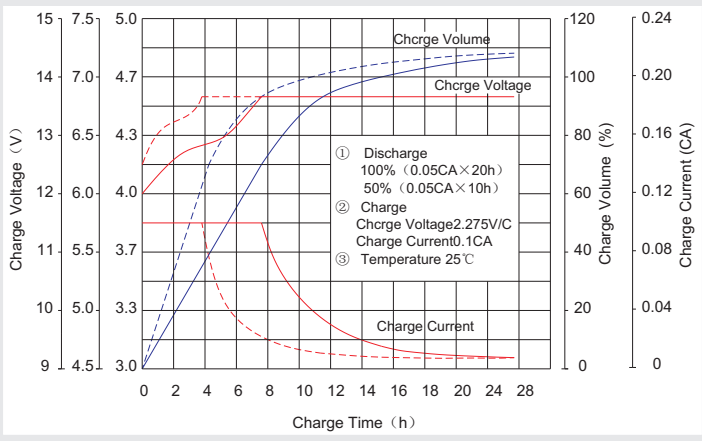

Discharge characteristic Curve

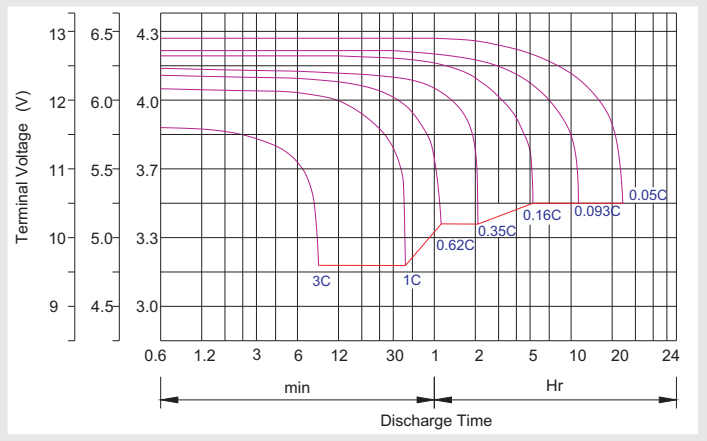

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Maintenance & Cautions

Float Service:
※ Every month, recommend inspection every battery voltage.
※ Every three months, recommend equalization charge for one time.
Equalization charge method:
Discharge: 100% rate capacity discharge.
Charge: Max. current 0.3CA, constant voltage 2.4-2.45V/Cell charge 24h.
※ Effect of temperature on float charge voltage: -3mV/°C/Cell.
※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	-0.2Cx2h+2.4-2.45V/cellx24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h